



United Technologies

Multinor[®] Switchable



Islands

Benefits at a glance



- Two-in-one solution for optimized merchandising flexibility
- Attractive ergonomic design
- Different length for optimized floor space utilization

Multinor® Switchable

Plug-in chiller & freezer island for promotional sales


Standard configuration

- Internal and external panels galvanized steel with hard-wearing NCS 0501-B58G white powder-coated finish
- Bumpers all around
- Electronic controller
- Condenser fan with reversing motor
- Temperature-assured air-forced cooling with honeycomb air outlet
- Automatic defrost with drip water evaporation



Multinor 2060/80 G

Basic models

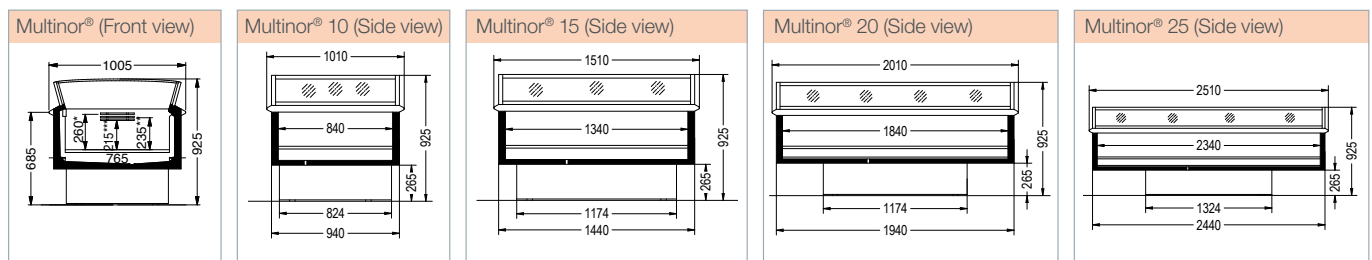

	Units	Natural					Standard			
		1540/80	1060/80 G	1560/80 G	2060/80 G	2560/80 G	1040/80	1540/80	2040/80	
Temperature	[°C]	0...+2 -22...-24		-2...0 -22...-24			+2...+4 -22...-24	0...+2 -22...-24		
Refrigerant		R290					R404A			
Width	[mm]	1005					1005			
Depth	[mm]	1510	1010	1510	2010	2510	1010	1510	2010	
Height	[mm]	925	945			925	925			
Volume Freezer mode	[l]	220	150	242	331	421	138	220	302	
Volume Chiller mode	[l]	242	150	242	331	421	150	242	331	
Power consumption ref.										
Freezer mode	[W]	850	368	733	1050	1053	495	860	1050	
Chiller mode		580	430	481	758	760	610	650	700	
Power consumption def.										
Freezer mode	[W]	1603	1300	1546	1633	2233	1280	1940	1960	
Chiller mode		1603	1300	1546	1633	2233	1280	1940	1960	
Energy consumption*										
Freezer mode	[kWh/d]	19.0	7.7	13.4	17.0	19.1	11.4	19.8	22.3	
Chiller mode		7.3	3.2	6.5	7.3	7.5	6.1	7.8	9.6	
Heat dispatch*										
Freezer mode	[W]	792	321	558	708	706	475	825	929	
Chiller mode		304	133	271	304	313	254	325	400	
Application										

* at Climate Class 3 according to ISO 23953



Carrier Commercial Refrigeration is a leading supplier of high-efficiency turnkey refrigeration systems and services in the food retail industry.

www.carrier-refrigeration.com
www.carrier.com

